



Designated according to The Construction Products (Amendment etc.) (EU Exit) Regulations 2020

UK Technical Assessment	UKTA-0836-22/6519 of 18/01/2023
Technical Assessment Body issuing the UK Technical Assessment:	British Board of Agrément
Trade name of the construction product:	Hilti S-MD; Hilti S-MS
Product family to which the construction product belongs:	Fastening screws for metal members and sheeting
Manufacturer:	Hilti AG Feldkircherstraße 100 9494 Schaan FÜRSTENTUM LIECHTENSTEIN
Manufacturing plant(s):	Hilti AG, Plant 2855 Hilti AG, Plant 6522
This UK Technical Assessment contains:	37 pages including 29 annexes which form an integral part of this assessment
This UK Technical Assessment is issued in accordance with The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 on the basis of:	UKAD 330046-01-0602 <i>Fastening screws for metal members and sheeting</i>

Communication of this UK Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of the British Board of Agrément. Any partial reproduction must be identified as such.

1. Technical description of the product

The fastening screws are self-drilling or self-piercing screws made of carbon steel with anticorrosion coating (listed in Table 1). The fastening screws are normally completed with sealing washers consisting of metal washer and EPDM-seal.

Table 1 – Fastening screws for metal members and sheeting

Annex	Product	Component I	Component II	Description
4	Hilti S-MS 01 Z 4,8 x L Hilti S-MS 01 C 4,8 x L	Steel S280GD to S350GD	Steel S280GD to S350GD	Self-piercing screw, Carbon steel, with hexagon head
5	Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L	Steel S280GD to S350GD	Steel S280GD to S350GD	Self-piercing screw, Carbon steel, with hexagon head and sealing washer Ø14 mm and Ø16 mm
6	Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L	Aluminium alloy $R_m \geq 215 \text{ N/mm}^2$	Aluminium alloy $R_m \geq 215 \text{ N/mm}^2$	Self-piercing screw, Carbon steel, with hexagon head and sealing washer Ø14 mm and Ø16 mm
7	Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L	Aluminium alloy $R_m \geq 165 \text{ N/mm}^2$	Aluminium alloy $R_m \geq 165 \text{ N/mm}^2$	Self-piercing screw, Carbon steel, with hexagon head and sealing washer Ø14 mm and Ø16 mm
8	Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L	Aluminium alloy $R_m \geq 215 \text{ N/mm}^2$	Steel S280GD to S350GD	Self-piercing screw, Carbon steel, with hexagon head and sealing washer Ø14 mm and Ø16 mm
9	Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L	Aluminium alloy $R_m \geq 165 \text{ N/mm}^2$	Steel S280GD to S350GD	Self-piercing screw, Carbon steel, with hexagon head and sealing washer Ø14 mm and Ø16 mm
10	Hilti S-MD 01 Z 4,2 x L Hilti S-MD 01 C 4,2 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head
11	Hilti S-MD 51 Z 4,2 x L Hilti S-MD 51 C 4,2 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
12	Hilti S-MD 01 Z 4,8 x L Hilti S-MD 01 C 4,8 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head
13	Hilti S-MD 51 Z 4,8 x L Hilti S-MD 51 C 4,8 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
14	Hilti S-MD 01 Z 5,5 x L Hilti S-MD 01 C 5,5 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head
15	Hilti S-MD 51 Z 5,5 x L Hilti S-MD 51 C 5,5 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
16	Hilti S-MD 01 Z 6,3 x L Hilti S-MD 01 C 6,3 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head

17	Hilti S-MD 51 Z 6,3 x L Hilti S-MD 51 C 6,3 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
18	Hilti S-MD 01 LZ 4,8 x L Hilti S-MD 01 LC 4,8 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head
19	Hilti S-MD 03 Z 4,8 x L Hilti S-MD 03 C 4,8 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head
20	Hilti S-MD 53 Z 4,8 x L Hilti S-MD 53 C 4,8 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
21	Hilti S-MD 03 Z 5,5 x L Hilti S-MD 03 C 5,5 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head
22	Hilti S-MD 23 Z 5,5 x L Hilti S-MD 23 C 5,5 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head with collar
23	Hilti S-MD 53 Z 5,5 x L Hilti S-MD 53 C 5,5 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
24	Hilti S-MD 03 Z 6,3 x L Hilti S-MD 03 C 6,3 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head
25	Hilti S-MD 23 Z 6,3 x L Hilti S-MD 23 C 6,3 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head with collar
26	Hilti S-MD 53 Z 6,3 x L Hilti S-MD 53 C 6,3 x L	Steel S280GD to S390GD	Steel S280GD to S390GD S235 to S355	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm
27	Hilti S-MD 05 GZ 5,5 x L Hilti S-MD 05 GC 5,5 x L Hilti S-MD 05 Z 5,5 x L Hilti S-MD 05 C 5,5 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head
28	Hilti S-MD 25 Z 5,5 x L Hilti S-MD 25 C 5,5 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head with collar
29	Hilti S-MD 55 GZ 5,5 x L Hilti S-MD 55 GC 5,5 x L Hilti S-MD 55 Z 5,5 x L Hilti S-MD 55 C 5,5 x L	Steel S280GD to S320GD	Steel S280GD to S320GD S235	Self-drilling screw, Carbon steel, with hexagon head and sealing washer Ø16 mm

2. Specification of the intended use(s) in accordance with the applicable UK Assessment Document (hereinafter UKAD)

The fastening screws are intended to be used for fastening metal sheeting to metal or timber substructures. The sheeting can either be used as wall or roof cladding or as load bearing wall and roof element. The fastening screws can also be used for the fastening of any other thin gauge metal members. The intended use comprises fastening screws and connections for indoor and outdoor applications. Fastening screws which are intended to be used in external environments with $\geq C2$ corrosion according to the standard EN ISO 12944-2: 2017 are made of stainless steel. Furthermore, the intended use comprises connections with predominantly static loads (e.g., wind loads, dead loads). The fastening screws are not intended for re-use.

The performances given in Section 3 are only valid if the fastening screws are used in compliance with the specifications and conditions given in Annex (1-29).

The verification and assessment methods on which this UK Technical Assessment is based lead to the assumption of a working life of the fastening screws of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1. Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Shear resistance of the connection	see Annexes to this UKTA
Tension resistance of the connection	see Annexes to this UKTA
Design resistance in case of combined tension and shear forces (interaction)	see Annexes to this UKTA
Check of deformation capacity in case of constraining forces due to temperature	No performance assessed
Durability	No performance assessed

3.2. Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Performance Class A1

3.3. Health, hygiene, and the environment (BWR 3)

Regarding dangerous substances, there may be additional legislative requirements falling outside of the scope of this document. These requirements must be complied with as appropriate.

3.4. Safety and accessibility in use (BWR 4)

Not relevant.

3.5. Protection against noise (BWR 5)

Not relevant.

3.6. Energy economy and heat retention (BWR 6)

Not relevant.

3.7. Sustainable use of natural resources (BWR 7)

No performance assessed.

4. Assessment and verification of constancy of performance (hereinafter AVCP) system applied

4.1. System of assessment and verification of constancy of performance

According to UKAD No. 330046-01-0602 and Annex V of the Construction Products Regulation (Regulation (EU) 305/2011) as brought into UK law and amended, the system of assessment and verification of constancy of performance (AVCP) 2+ applies.

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable UKAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with the British Board of Agrément and made available to the UK Approved Bodies involved in the conformity attestation process.

5.1. UKCA marking for the product/ system must contain the following information:

- Identification number of the Approved Body
- Name/address of the manufacturer of the product/ system
- Marking with intention of clarification of intended use
- Date of marking
- Number of Certificate of Conformity of Factory Production Control.
- UKTA number.

On behalf of the British Board of Agrément



Date of Issue: 18 January 2023

Hardy Giesler
Chief Executive Officer



British Board of Agrément,
1st Floor Building 3,
Hatters Lane,
Croxley Park
Watford
WD18 8YG

ANNEX

This annex applies to the product described in the main body of the UK Technical Assessment.

Annex 1 – Terms and explanations

Annex 2 – Design

Annex 3 – Installation and additional provisions

Annex 4 – Self piercing screw

Annex 5 – Self piercing screw

Annex 6 – Self piercing screw

Annex 7 – Self piercing screw

Annex 8 – Self piercing screw

Annex 9 – Self piercing screw

Annex 10 – Self drilling screw

Annex 11 – Self drilling screw

Annex 12 – Self drilling screw

Annex 13 – Self drilling screw

Annex 14 – Self drilling screw

Annex 15 – Self drilling screw

Annex 16 – Self drilling screw

Annex 17 – Self drilling screw

Annex 18 – Self drilling screw

Annex 19 – Self drilling screw

Annex 20 – Self drilling screw

Annex 21 – Self drilling screw

Annex 22 – Self drilling screw

Annex 23 – Self drilling screw

Annex 24 – Self drilling screw

Annex 25 – Self drilling screw


Annex 26 – Self drilling screw

Annex 27 – Self drilling screw

Annex 28 – Self drilling screw

Annex 29 – Self drilling screw

Examples of execution of a connection

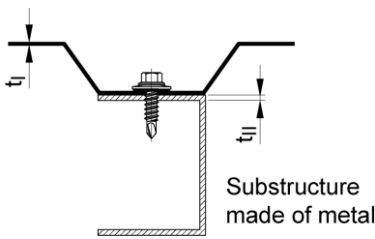

Materials and dimensions

Design relevant materials and dimensions are indicated in the Annexes of the fastening screws:

Fastener	Material of the fastening screw
Washer	Material of the sealing washer
Component I	Material of the metal member or sheeting
Component II	Material of the substructure

t_I	Thickness of component I
t_{II}	Thickness of component II made of metal

The thickness t_{II} corresponds to the load-bearing screw-in length of the fastening screw in component II if the load-bearing screw-in length does not cover the entire component thickness.

Performance characteristics

The design relevant performance characteristics of a connection are indicated in the Annexes of the fastening screws:


$N_{R,k}$	Characteristic value of tension resistance
$V_{R,k}$	Characteristic value of shear resistance

In some cases, component-specific performance characteristics are indicated for an individual calculation of the design relevant performance characteristics of a connection:

$N_{R,I,k}$	Characteristic value of pull-through resistance for component I
$N_{R,II,k}$	Characteristic value of pull-out resistance for component II
$V_{R,I,k}$	Characteristic value of hole bearing resistance for component I
$V_{R,II,k}$	Characteristic value of hole bearing resistance for component II

Terms and explanations	
Fastening screws for metal members and sheeting	Annex 1

Occurred loadings of a connection

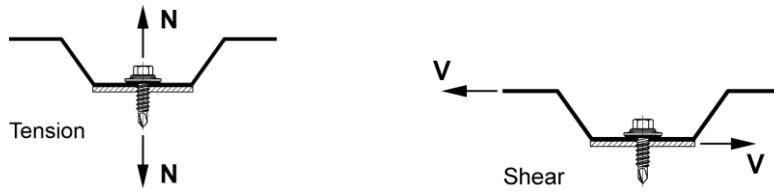

Design values

The design values of tension and shear resistance of a connection must be determined as follows:

$$N_{R,d} = \frac{N_{R,k}}{\gamma_M}$$

$$V_{R,d} = \frac{V_{R,k}}{\gamma_M}$$

- $N_{R,d}$ Design value of tension resistance
- $V_{R,d}$ Design value of shear resistance
- γ_M Partial safety factor

The recommended partial safety factor γ_M is 1,33, provided no partial safety factor is given in national regulations or national Annexes to Eurocode 3.

Special conditions

If the component thickness t_I or t_{II} lies in between two indicated component thicknesses, the characteristic value may be calculated by linear interpolation.

For asymmetric components II made of metal (e.g. Z- or C-shaped profiles) with component thickness $t_{II} < 5$ mm, the characteristic value $N_{R,k}$ has to be reduced to 70%.


In case of combined loading by tension and shear forces the following interaction, equation must be considered:

$$\frac{N_{S,d}}{N_{R,d}} + \frac{V_{S,d}}{V_{R,d}} \leq 1,0$$


- $N_{S,d}$ Design value of the applied tension forces
- $V_{S,d}$ Design value of the applied shear forces

Types of connection

For the types of connection (a, b, c, d) given in the Annexes of the fastening screws, it is not necessary to consider the effect of constraints due to temperature. For other types of connection, the effect of constraints must be considered, unless they do not occur or are not significant (e.g., sufficient flexibility of the substructure).




Single connection



Side lap connection



End overlap connection



Side lap + end overlap connection

Design

Fastening screws for metal members and sheeting

Annex 2

Installation conditions

The installation is carried out according to the manufacturer's instruction.

The load bearing screw-in length of the fastening screw specified by the manufacturer must be considered.

The fastening screws must be processed with suitable drill driver (e.g., cordless drill driver with depth stop). The use of an impact wrench is not allowed.

The fastening screws must be fixed rectangular to the surface of the component.

Component I and component II must be in direct contact with each other. The use of compression resistant thermal insulation strips up to a thickness of 3 mm is allowed.

Component I made of aluminium alloy


The characteristic value of tension resistance is given in the Annex of the fastening screw. If not, the characteristic value of tension resistance can be determined as follows:

$$N_{R,k} = \min \begin{cases} N_{R,I,k} \\ N_{R,II,k} \end{cases}$$

$N_{R,I,k}$ is determined according to EN 1999-1-4:2007 + A1:2011, equation (8.13).

$N_{R,II,k}$ is given in the Annex of the fastening screw.

Installation and additional provisions	
Fastening screws for metal members and sheeting	Annex 3

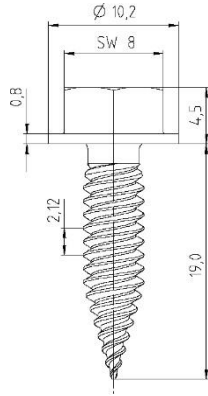

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD, S350GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD - EN 10346: 2015

Drilling capacity: $\Sigma t_i \leq 2,50$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ii} [mm]								
	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	
$V_{R,k}$ [kN]	0,50	1,29	1,37	1,51	1,71	1,71	1,71	1,71	1,71
	0,55	1,29	1,54	1,65	1,82	1,82	1,82	1,82	2,05
	0,63	1,29	1,54	1,80	2,00	2,00	2,00	2,00	2,59
	0,75	1,29	1,54	1,80	2,27	2,27	2,27	2,84	3,40
	0,88	1,29	1,54	1,80	2,27	2,96	2,96	2,96	3,40
	1,00	1,29	1,54	1,80	2,27	2,96	3,64	3,64	3,64
	1,13	1,29	1,54	1,80	2,27	2,96	3,64	3,87	3,87
	1,25	1,29	1,54	1,80	2,27	2,96	3,64	3,87	4,10
	1,50	1,29	1,54	1,80	2,27	2,96	3,64	—	—
	1,75	1,29	1,54	1,80	2,27	—	—	—	—
	2,00	1,29	—	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,50	0,76	0,87	1,04	1,29	1,56	1,82	1,93	1,93
	0,55	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,25
	0,63	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,34
	0,75	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,34
	0,88	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,34
	1,00	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,34
	1,13	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,34
	1,25	0,76	0,87	1,04	1,29	1,56	1,82	2,09	2,34
	1,50	0,76	0,87	1,04	1,29	1,56	1,82	—	—
	1,75	0,76	0,87	1,04	1,29	—	—	—	—
	2,00	0,76	—	—	—	—	—	—	—
$M_{t,nom}$ [Nm]									

No additional regulations.

Self piercing screw

Hilti S-MS 01 Z 4,8 x L
Hilti S-MS 01 C 4,8 x L
with hexagon head

Annex 4

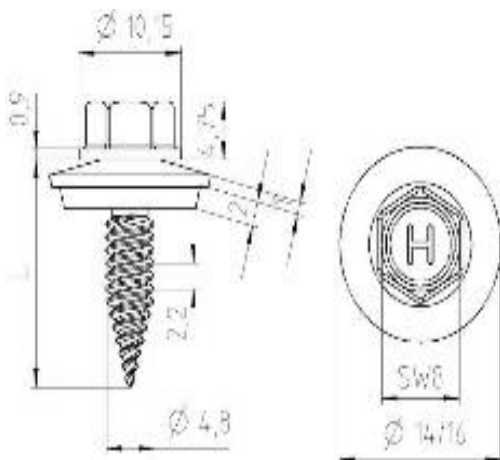

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD, S350GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD - EN 10346: 2015

Drilling capacity: $\Sigma t_i \leq 2,50$ mm

Timber substructures:

No performance determined

t_i [mm]	t_{ii} [mm]												
	0,40	0,50	0,55	0,63	0,75	0,88	1,00	1,25	0,40	0,50	0,55	0,63	
$V_{R,k}$ [kN]	0,40	0,81	0,87	0,90	0,95	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03
	0,50	0,81	1,01	1,01	1,02	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03
	0,55	0,81	1,01	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26
	0,63	0,81	1,01	1,26	1,66	1,66	1,66	1,66	1,66	1,66	1,66	1,66	1,66
	0,75	0,81	1,01	1,26	1,66	2,26	2,26	2,26	2,26	2,26	2,26	2,26	2,26
	0,88	0,81	1,01	1,26	1,66	2,26	2,77	2,77	2,77	2,77	2,77	2,77	2,77
	1,00	0,81	1,01	1,26	1,66	2,26	2,77	3,24	3,24	3,24	3,24	3,24	3,24
	1,25	0,81	1,01	1,26	1,66	2,26	2,77	3,24	4,24	4,24	4,24	4,24	4,24
$N_{R,k}$ [kN]	0,40	0,46	0,76	0,86	1,03	1,27	1,43	1,43	1,43	1,43	1,43	1,43	1,43
	0,50	0,46	0,76	0,86	1,03	1,27	1,60	1,80	1,80	1,80	1,80	1,80	1,80
	0,55	0,46	0,76	0,86	1,03	1,27	1,60	1,90	1,90	1,90	1,90	1,90	1,90
	0,63	0,46	0,76	0,86	1,03	1,27	1,60	1,90	2,34	2,34	2,34	2,34	2,34
	0,75	0,46	0,76	0,86	1,03	1,27	1,60	1,90	2,49	2,49	2,49	2,49	2,49
	0,88	0,46	0,76	0,86	1,03	1,27	1,60	1,90	2,49	2,49	2,49	2,49	2,49
	1,00	0,46	0,76	0,86	1,03	1,27	1,60	1,90	2,49	2,49	2,49	2,49	2,49
	1,25	0,46	0,76	0,86	1,03	1,27	1,60	1,90	2,49	2,49	2,49	2,49	2,49
$M_{t,nom}$ [Nm]													

If both components I and II are made of S320GD or S350GD the grey highlighted values may be increased by 8,0%.

Self piercing screw

Hilti S-MS 41 Z 4,8 x L
Hilti S-MS 41 C 4,8 x L
Hilti S-MS 51 Z 4,8 x L
Hilti S-MS 51 C 4,8 x L
with hexagon head and sealing washer $\geq \varnothing 14$ mm


Annex 5

	Material: Fastener: carbon steel, case hardened and galvanized or coated Washer: carbon steel, galvanized or coated stainless Steel (1.4301) - EN 10088-1: 2014 Component I: aluminium alloy with $R_{m,min} = 215 \text{ N/mm}^2$ - EN 573-3: 2019 + A1: 2022 Component II: aluminium alloy with $R_{m,min} = 215 \text{ N/mm}^2$ - EN 573-3: 2019 + A1: 2022
	Drilling capacity: $\Sigma t_i \leq 2,50 \text{ mm}$
Timber substructures: No performance determined	

t_i [mm]	t_{II} [mm]						
	0,50	0,60	0,70	0,80	1,00	1,20	
$V_{R,k}$ [kN]	0,50	0,71 —	0,71 —	0,71 —	0,71 —	0,71 —	0,71 —
	0,60	0,71 —	0,92 —	0,92 —	0,92 —	0,92 —	0,92 —
	0,70	0,71 —	0,92 —	1,14 —	1,14 —	1,14 —	1,14 —
	0,80	0,71 —	0,92 —	1,14 —	1,35 —	1,35 —	1,35 —
	1,00	0,71 —	0,92 —	1,14 —	1,35 —	1,88 —	1,88 —
	1,20	0,71 —	0,92 —	1,14 —	1,35 —	1,88 —	2,28 —
$N_{R,k}$ [kN]	0,50	0,35 —	0,49 —	0,52 —	0,52 —	0,52 —	0,52 —
	0,60	0,35 —	0,49 —	0,63 —	0,63 —	0,63 —	0,63 —
	0,70	0,35 —	0,49 —	0,63 —	0,73 —	0,73 —	0,73 —
	0,80	0,35 —	0,49 —	0,63 —	0,77 —	0,84 —	0,84 —
	1,00	0,35 —	0,49 —	0,63 —	0,77 —	1,00 —	1,05 —
	1,20	0,35 —	0,49 —	0,63 —	0,77 —	1,00 —	1,26 —
$N_{R,II,k}$ [kN]	0,35	0,49	0,63	0,77	1,00	1,29	
$M_{t,nom}$ [Nm]							

The pull-through-capacities of the grey highlighted values $N_{R,k}$ have been determined according to EN 1999-1-4:2007 + A1: 2011 section 8.3.3.1 by calculation. This values $N_{R,k}$ may be increased by 6,9% when using the type „S-MS 5x“.

Self piercing screw	Annex 6
Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L with hexagon head and sealing washer $\geq \text{Ø}14 \text{ mm}$	

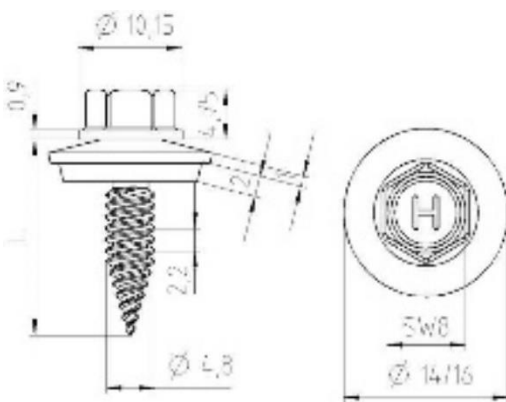

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: aluminium alloy with $R_{m,min} = 165 \text{ N/mm}^2$ - EN 573-3: 2019 + A1: 2022

Component II: aluminium alloy with $R_{m,min} = 165 \text{ N/mm}^2$ - EN 573-3: 2019 + A1: 2022

Drilling capacity: $\Sigma t_i \leq 2,50 \text{ mm}$

Timber substructures:

No performance determined

t_i [mm]	t_{II} [mm]						
	0,50	0,60	0,70	0,80	1,00	1,20	
$V_{R,k}$ [kN]	0,50	0,55 —	0,55 —	0,55 —	0,55 —	0,55 —	0,55 —
	0,60	0,55 —	0,71 —	0,71 —	0,71 —	0,71 —	0,71 —
	0,70	0,55 —	0,71 —	0,88 —	0,88 —	0,88 —	0,88 —
	0,80	0,55 —	0,71 —	0,88 —	1,04 —	1,04 —	1,04 —
	1,00	0,55 —	0,71 —	0,88 —	1,04 —	1,44 —	1,44 —
	1,20	0,55 —	0,71 —	0,88 —	1,04 —	1,44 —	1,83 —
$N_{R,k}$ [kN]	0,50	0,27 —	0,38 —	0,40 —	0,40 —	0,40 —	0,40 —
	0,60	0,27 —	0,38 —	0,48 —	0,48 —	0,48 —	0,48 —
	0,70	0,27 —	0,38 —	0,48 —	0,56 —	0,56 —	0,56 —
	0,80	0,27 —	0,38 —	0,48 —	0,59 —	0,64 —	0,64 —
	1,00	0,27 —	0,38 —	0,48 —	0,59 —	0,76 —	0,80 —
	1,20	0,27 —	0,38 —	0,48 —	0,59 —	0,76 —	0,96 —
$N_{R,II,k}$ [kN]	0,27	0,38	0,48	0,59	0,76	1,03	
$M_{t,nom}$ [Nm]							

The pull-through-capacities of the grey highlighted values $N_{R,k}$ have been determined according to EN 1999-1-4:2007 + A1: 2011 section 8.3.3.1 by calculation. This values $N_{R,k}$ may be increased by 6,9% when using the type „S-MS 5x“.

Self piercing screw

- Hilti S-MS 41 Z 4,8 x L
- Hilti S-MS 41 C 4,8 x L
- Hilti S-MS 51 Z 4,8 x L
- Hilti S-MS 51 C 4,8 x L

with hexagon head and sealing washer $\geq \text{Ø}14 \text{ mm}$


Annex 7

	<p>Material:</p> <p>Fastener: carbon steel, case hardened and galvanized or coated</p> <p>Washer: carbon steel, galvanized or coated stainless Steel (1.4301) - EN 10088-1: 2014</p> <p>Component I: aluminium alloy with $R_{m,min} = 215 \text{ N/mm}^2$ - EN 573-3: 2019 + A1: 2022</p> <p>Component II: S280GD, S320GD, S350GD - EN 10346: 2015</p>
	<p>Drilling capacity: $\Sigma t_i \leq 2,50 \text{ mm}$</p> <p>Timber substructures: No performance determined</p>

t_i [mm]	t_{ii} [mm]							
	0,50	0,55	0,63	0,75	0,88	1,00	1,25	
$V_{R,k}$ [kN]	0,50	0,71 —	0,71 —	0,71 —	0,71 —	0,71 —	0,71 —	0,71 —
	0,60	0,71 —	0,71 —	0,92 —	0,92 —	0,92 —	0,92 —	0,92 —
	0,70	0,71 —	0,71 —	0,92 —	1,14 —	1,14 —	1,14 —	1,14 —
	0,80	0,71 —	0,71 —	0,92 —	1,14 —	1,35 —	1,35 —	1,35 —
	1,00	0,71 —	0,71 —	0,92 —	1,14 —	1,35 —	1,88 —	1,88 —
	1,20	0,71 —	0,71 —	0,92 —	1,14 —	1,35 —	1,88 —	2,28 —
$N_{R,k}$ [kN]	0,50	0,52 —	0,52 —	0,52 —	0,52 —	0,52 —	0,52 —	0,52 —
	0,60	0,63 —	0,63 —	0,63 —	0,63 —	0,63 —	0,63 —	0,63 —
	0,70	0,73 —	0,73 —	0,73 —	0,73 —	0,73 —	0,73 —	0,73 —
	0,80	0,76 —	0,84 —	0,84 —	0,84 —	0,84 —	0,84 —	0,84 —
	1,00	0,76 —	0,87 —	1,04 —	1,05 —	1,05 —	1,05 —	1,05 —
	1,20	0,76 —	0,87 —	1,04 —	1,26 —	1,26 —	1,26 —	1,26 —
$N_{R,II,k}$ [kN]	0,76	0,87	1,04	1,28	1,58	1,86	2,42	
$M_{t,nom}$ [Nm]								

The pull-through-capacities of the grey highlighted values $N_{R,k}$ have been determined according to EN 1999-1-4:2007 + A1: 2011 section 8.3.3.1 by calculation. This values $N_{R,k}$ may be increased by 6,9% when using the type „S-MS 5x“.

Self piercing screw	Annex 8
Hilti S-MS 41 Z 4,8 x L Hilti S-MS 41 C 4,8 x L Hilti S-MS 51 Z 4,8 x L Hilti S-MS 51 C 4,8 x L with hexagon head and sealing washer $\geq \text{Ø}14 \text{ mm}$	

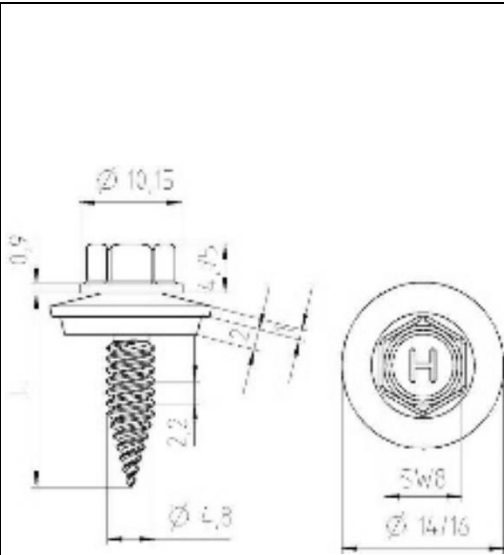

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: aluminium alloy with $R_{m,min} = 165 \text{ N/mm}^2$ - EN 573-3: 2019 + A1: 2022

Component II: S280GD, S320GD, S350GD - EN 10346: 2015

Drilling capacity: $\Sigma t_i \leq 2,50 \text{ mm}$

Timber substructures:

No performance determined


t_i [mm]	t_{ii} [mm]						
	0,50	0,55	0,63	0,75	0,88	1,00	1,25
$V_{R,k}$ [kN]	0,50	0,55	0,55	0,55	0,55	0,55	0,55
	0,60	0,55	0,55	0,71	0,71	0,71	0,71
	0,70	0,55	0,55	0,71	0,88	0,88	0,88
	0,80	0,55	0,55	0,71	0,88	1,04	1,04
	1,00	0,55	0,55	0,71	0,88	1,04	1,44
	1,20	0,55	0,55	0,71	0,88	1,04	1,44
$N_{R,k}$ [kN]	0,50	0,40	0,40	0,40	0,40	0,40	0,40
	0,60	0,48	0,48	0,48	0,48	0,48	0,48
	0,70	0,56	0,56	0,56	0,56	0,56	0,56
	0,80	0,64	0,64	0,64	0,64	0,64	0,64
	1,00	0,76	0,80	0,80	0,80	0,80	0,80
	1,20	0,76	0,87	0,96	0,96	0,96	0,96
$N_{R,II,k}$ [kN]	0,76	0,87	1,04	1,28	1,58	1,86	2,42
$M_{t,nom}$ [Nm]							

The pull-through-capacities of the grey highlighted values $N_{R,k}$ have been determined according to EN 1999-1-4:2007 + A1: 2011 section 8.3.3.1 by calculation. This values $N_{R,k}$ may be increased by 6,9% when using the type „S-MS 5x“.

Self piercing screw

Hilti S-MS 41 Z 4,8 x L
Hilti S-MS 41 C 4,8 x L
Hilti S-MS 51 Z 4,8 x L
Hilti S-MS 51 C 4,8 x L
with hexagon head and sealing washer $\geq \text{Ø}14 \text{ mm}$

Annex 9

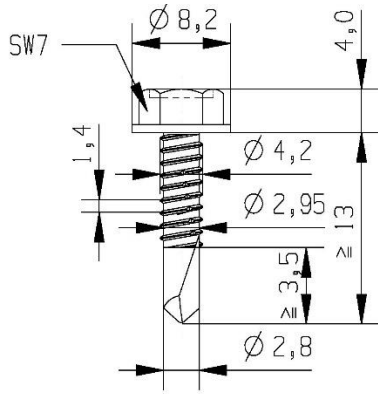

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 2,50$ mm

Timber substructures:

No performance determined



t_i [mm]	t_{II} [mm]								
	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00	
$V_{R,k}$ [kN]									
0,50	—	—	—	—	—	—	—	—	—
0,55	—	—	—	—	—	—	—	—	—
0,63	1,50	2,00	2,50	2,60	2,60 ac	2,60 ac	2,60 a	—	—
0,75	1,70	2,10	2,60	3,00	3,60	4,00	4,00	—	—
0,88	1,80	2,20	2,80	3,30	4,00	4,50	4,50	—	—
1,00	1,90	2,40	3,00	3,60	4,30	5,00	5,00	—	—
1,13	1,90	2,40	3,00	3,60	4,30	5,00	—	—	—
1,25	1,90	2,40	3,00	3,60	4,30	5,00	—	—	—
1,50	1,90	2,40	3,00	3,60	—	—	—	—	—
1,75	1,90	2,40	—	—	—	—	—	—	—
2,00	—	—	—	—	—	—	—	—	—
$N_{R,k}$ [kN]									
0,50	—	—	—	—	—	—	—	—	—
0,55	—	—	—	—	—	—	—	—	—
0,63	0,90	1,20	1,40	1,40	1,40 ac	1,40 ac	1,40 a	—	—
0,75	0,90	1,20	1,40	1,70	1,90	2,00	2,00	—	—
0,88	0,90	1,20	1,40	1,70	1,90	2,20	2,70	—	—
1,00	0,90	1,20	1,40	1,70	1,90	2,20	2,80	—	—
1,13	0,90	1,20	1,40	1,70	1,90	2,20	—	—	—
1,25	0,90	1,20	1,40	1,70	1,90	2,20	—	—	—
1,50	0,90	1,20	1,40	1,70	—	—	—	—	—
1,75	0,90	1,20	—	—	—	—	—	—	—
2,00	—	—	—	—	—	—	—	—	—
$M_{t, nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 2 Nm				$\Sigma t > 1,25$ mm: 4 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 01 Z 4,2 x L
Hilti S-MD 01 C 4,2 x L
with hexagon head

Annex 10

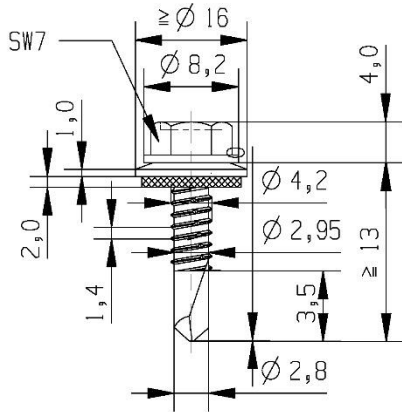

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 2,50$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ij} [mm]															
	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00								
$V_{R,k}$ [kN]	—	—	—	—	—	—	—	—	—							
0,50	—	—	—	—	—	—	—	—	—							
0,55	—	—	—	—	—	—	—	—	—							
0,63	1,40	—	1,80	—	2,40	—	3,00	—	3,10	ac	3,10	ac	3,10	a	—	—
0,75	1,40	—	1,80	—	2,40	—	3,00	—	3,60	—	3,60	a	3,60	a	—	—
0,88	1,40	—	1,80	—	2,40	—	3,00	—	3,70	—	4,00	—	4,00	—	—	—
1,00	1,40	—	1,80	—	2,40	—	3,00	—	3,70	—	4,40	—	4,40	—	—	—
1,13	1,40	—	1,80	—	2,40	—	3,00	—	3,70	—	4,40	—	—	—	—	—
1,25	1,40	—	1,80	—	2,40	—	3,00	—	3,70	—	4,40	—	—	—	—	—
1,50	1,40	—	1,80	—	2,40	—	3,00	—	—	—	—	—	—	—	—	—
1,75	1,40	—	1,80	—	—	—	—	—	—	—	—	—	—	—	—	—
2,00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,49	—	0,65	—	0,76	—	0,92	—	1,03	ac	1,19	ac	1,40	a	—	—
0,50	0,61	—	0,82	—	0,95	—	1,16	—	1,30	ac	1,50	ac	1,77	a	—	—
0,55	0,90	—	1,20	—	1,40	—	1,70	—	1,90	ac	2,20	ac	2,60	a	—	—
0,63	0,90	—	1,20	—	1,40	—	1,70	—	1,90	—	2,20	a	2,80	a	—	—
0,75	0,90	—	1,20	—	1,40	—	1,70	—	1,90	—	2,20	—	2,80	—	—	—
0,88	0,90	—	1,20	—	1,40	—	1,70	—	1,90	—	2,20	—	2,80	—	—	—
1,00	0,90	—	1,20	—	1,40	—	1,70	—	1,90	—	2,20	—	2,80	—	—	—
1,13	0,90	—	1,20	—	1,40	—	1,70	—	1,90	—	2,20	—	—	—	—	—
1,25	0,90	—	1,20	—	1,40	—	1,70	—	1,90	—	2,20	—	—	—	—	—
1,50	0,90	—	1,20	—	1,40	—	1,70	—	—	—	—	—	—	—	—	—
1,75	0,90	—	1,20	—	—	—	—	—	—	—	—	—	—	—	—	—
2,00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
$M_{t, nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 2 Nm								$\Sigma t > 1,25$ mm: 4 Nm							

No additional regulations.

Self drilling screw

Hilti S-MD 51 Z 4,2 x L
Hilti S-MD 51 C 4,2 x L
with hexagon head and sealing washer $\geq \text{Ø}16$ mm

Annex 11

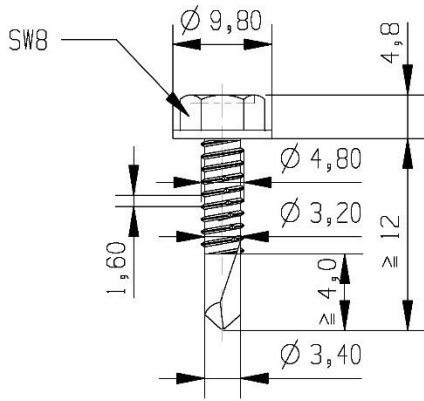

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 2,75$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ii} [mm]																
	0,63		0,75		0,88		1,00		1,13		1,25		1,50		2,00		
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,63	1,40	—	1,80	—	2,10	—	2,40	—	2,70	—	3,00	ac	3,60	ac	3,60	ac
	0,75	1,40	—	1,90	—	2,30	—	2,70	—	3,10	—	3,50	—	4,40	—	4,40	a
	0,88	1,40	—	1,90	—	2,40	—	2,90	—	3,30	—	3,90	—	5,10	—	—	—
	1,00	1,40	—	1,90	—	2,40	—	3,00	—	3,60	—	4,30	—	5,80	—	—	—
	1,13	1,40	—	1,90	—	2,40	—	3,00	—	3,60	—	4,30	—	5,80	—	—	—
	1,25	1,40	—	1,90	—	2,40	—	3,00	—	3,60	—	4,30	—	5,80	—	—	—
	1,50	1,40	—	2,00	—	2,70	—	3,50	—	4,40	—	5,40	—	—	—	—	—
	1,75	1,40	—	2,00	—	2,70	—	3,50	—	—	—	—	—	—	—	—	—
	2,00	1,40	—	2,00	—	—	—	—	—	—	—	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,63	0,80	—	1,00	—	1,30	—	1,40	—	1,40	—	1,40	ac	1,40	ac	1,40	ac
	0,75	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,00	—	2,00	—	2,00	a
	0,88	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,00	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,13	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,25	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,50	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	—	—	—	—
	1,75	0,80	—	1,00	—	1,30	—	1,50	—	—	—	—	—	—	—	—	—
	2,00	0,80	—	1,00	—	—	—	—	—	—	—	—	—	—	—	—	—
$M_{t, nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 2 Nm								$\Sigma t > 1,25$ mm: 5 Nm								

No additional regulations.

Self drilling screw

Hilti S-MD 01 Z 4,8 x L
Hilti S-MD 01 C 4,8 x L
with hexagon head

Annex 12

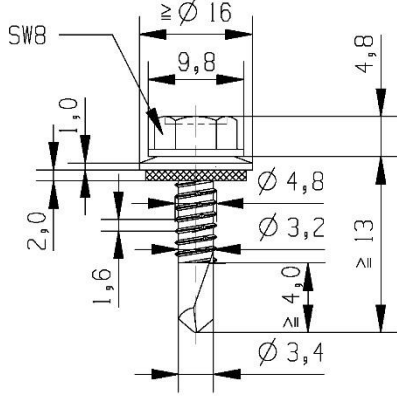

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 2,75$ mm

Timber substructures:

No performance determined



t_i [mm]	t_{ij} [mm]																
	0,63		0,75		0,88		1,00		1,13		1,25		1,50		2,00		
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,63	1,30	—	1,80	—	2,30	—	2,90	—	2,90	ac	2,90	ac	2,90	ac	2,90	ac
	0,75	1,30	—	1,80	—	2,30	—	2,90	—	3,51	—	3,70	ac	3,70	ac	3,70	a
	0,88	1,30	—	1,80	—	2,30	—	2,90	—	3,51	—	4,10	—	4,80	a	—	—
	1,00	1,30	—	1,80	—	2,30	—	2,90	—	3,51	—	4,10	—	5,60	—	—	—
	1,13	1,30	—	1,80	—	2,30	—	2,90	—	3,51	—	4,10	—	5,60	—	—	—
	1,25	1,30	—	1,80	—	2,30	—	2,90	—	3,51	—	4,10	—	5,60	—	—	—
	1,50	1,30	—	1,90	—	2,70	—	3,60	—	4,70	—	5,90	—	—	—	—	—
	1,75	1,30	—	1,90	—	2,70	—	3,60	—	—	—	—	—	—	—	—	—
2,00	1,30	—	1,90	—	—	—	—	—	—	—	—	—	—	—	—	—	
$N_{R,k}$ [kN]	0,50	0,43	—	0,54	—	0,70	—	0,81	—	0,97	ac	1,13	ac	1,40	ac	1,40	ac
	0,55	0,55	—	0,68	—	0,89	—	1,02	—	1,23	ac	1,43	ac	1,77	ac	1,77	ac
	0,63	0,80	—	1,00	—	1,30	—	1,50	—	1,80	ac	2,10	ac	2,60	ac	2,60	ac
	0,75	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	ac	2,70	ac	2,70	a
	0,88	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	a	—	—
	1,00	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,13	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,25	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	2,70	—	—	—
	1,50	0,80	—	1,00	—	1,30	—	1,50	—	1,80	—	2,10	—	—	—	—	—
	1,75	0,80	—	1,00	—	1,30	—	1,50	—	—	—	—	—	—	—	—	—
2,00	0,80	—	1,00	—	—	—	—	—	—	—	—	—	—	—	—	—	
$M_{t, nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 2 Nm								$\Sigma t > 1,25$ mm: 5 Nm								

No additional regulations.

Self drilling screw

Hilti S-MD 51 Z 4,8 x L
Hilti S-MD 51 C 4,8 x L
with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 13

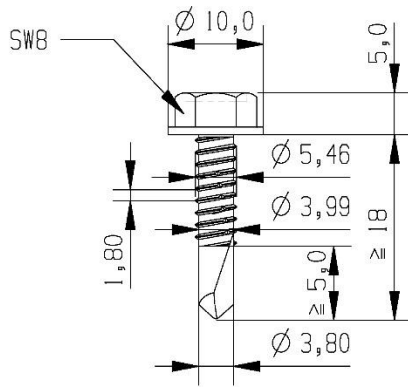

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 3,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ij} [mm]									
	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00		
$V_{R,k}$ [kN]	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00
	—	—	—	—	—	—	—	—	—	—
	1,50	1,80	2,00	2,10	2,30	2,40	2,60	2,60	2,60	2,60
	1,60	2,00	2,50	2,90	3,40	3,80	3,80	3,80	3,80	3,80
	1,70	2,10	2,60	3,00	3,50	4,00	4,50	4,50	5,10	5,10
	1,90	2,30	2,80	3,20	3,70	4,20	5,20	5,20	5,20	5,20
	2,70	3,10	3,60	3,90	4,40	5,10	5,90	5,90	5,90	5,90
	3,50	3,90	4,30	4,60	5,00	6,00	6,60	6,60	6,60	6,60
	3,50	3,90	4,30	4,60	5,60	6,00	6,60	6,60	6,60	6,60
	3,50	3,90	4,30	4,60	5,60	6,00	6,00	6,00	6,00	6,00
	3,50	3,90	4,30	4,60	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00
	—	—	—	—	—	—	—	—	—	—
	0,90	1,20	1,50	1,70	1,70	1,70	1,70	1,70	1,70	1,70
	0,90	1,20	1,50	1,80	2,10	2,30	2,30	2,30	2,30	2,30
	0,90	1,20	1,50	1,80	2,10	2,40	2,90	2,90	2,90	2,90
	0,90	1,20	1,50	1,80	2,10	2,40	3,10	3,10	3,10	3,10
	0,90	1,20	1,50	1,80	2,10	2,40	3,10	3,10	3,10	3,10
	0,90	1,20	1,50	1,80	2,10	2,40	3,10	3,10	3,10	3,10
	0,90	1,20	1,50	1,80	2,10	2,40	2,40	2,40	2,40	2,40
	0,90	1,20	1,50	1,80	2,10	2,40	2,40	2,40	2,40	2,40
	0,90	1,20	1,50	1,80	—	—	—	—	—	—
$M_{t, nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 3 Nm					$\Sigma t > 1,25$ mm: 6 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 01 Z 5,5 x L
Hilti S-MD 01 C 5,5 x L
with hexagon head

Annex 14

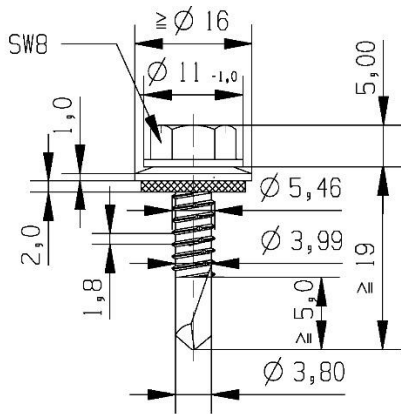

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 3,00$ mm

Timber substructures:

No performance determined

t_f [mm]	t_{II} [mm]								
	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	1,30	1,70	2,30	2,90	3,20	3,20 ac	3,20 ac	3,20 ac
	0,75	1,30	1,70	2,30	2,90	3,60	4,00 ac	4,00 ac	4,00 a
	0,88	1,30	1,70	2,30	2,90	3,60	4,20	4,80 a	4,80 a
	1,00	1,30	1,70	2,30	2,90	3,60	4,20	5,60	5,60 a
	1,13	1,60	2,00	2,60	3,20	3,80	4,40	5,80	—
	1,25	1,60	2,00	2,60	3,50	4,10	4,70	6,00	—
	1,50	1,60	2,00	2,60	4,60	5,10	5,50	6,50	—
	1,75	1,60	2,00	2,60	4,60	5,10	5,50	—	—
	2,00	1,60	2,00	2,60	4,60	—	—	—	—
$N_{R,k}$ [kN]	0,50	0,49	0,65	0,81	0,97	1,13	1,30 ac	1,67 ac	1,73 ac
	0,55	0,61	0,82	1,02	1,23	1,43	1,64 ac	2,11 ac	2,18 ac
	0,63	0,90	1,20	1,50	1,80	2,10	2,40 ac	3,10 ac	3,20 ac
	0,75	0,90	1,20	1,50	1,80	2,10	2,40 ac	3,10 ac	3,90 a
	0,88	0,90	1,20	1,50	1,80	2,10	2,40	3,10 a	4,70 a
	1,00	0,90	1,20	1,50	1,80	2,10	2,40	3,10	4,70 a
	1,13	0,90	1,20	1,50	1,80	2,10	2,40	3,10	—
	1,25	0,90	1,20	1,50	1,80	2,10	2,40	3,10	—
	1,50	0,90	1,20	1,50	1,80	2,10	2,40	3,10	—
	1,75	0,90	1,20	1,50	1,80	2,10	2,40	—	—
	2,00	0,90	1,20	1,50	1,80	—	—	—	—
$M_{t,nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 3 Nm				$\Sigma t > 1,25$ mm: 6 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 51 Z 5,5 x L
Hilti S-MD 51 C 5,5 x L
with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 15

SW3/8" und SW8



Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 3,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ii} [mm]									
	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00		
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—	—
	0,63	1,50	2,00	2,50	2,90	3,50	3,70	ac	3,70	ac
	0,75	1,90	2,30	2,80	3,30	3,80	4,30	—	4,80	ac
	0,88	2,00	2,40	2,90	3,30	3,80	4,30	—	5,10	—
	1,00	2,10	2,50	3,00	3,40	3,90	4,40	—	5,40	—
	1,13	2,10	2,50	3,10	3,60	4,20	4,80	—	6,00	—
	1,25	2,10	2,60	3,30	3,90	4,60	5,20	—	6,70	—
	1,50	2,10	2,60	3,30	3,90	4,60	5,20	—	6,70	—
	1,75	2,10	2,60	3,30	3,90	4,60	5,20	—	—	—
2,00	2,10	2,60	3,30	3,90	—	—	—	—	—	
$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—	—
	0,63	0,90	1,20	1,50	1,80	1,90	1,90	ac	1,90	ac
	0,75	0,90	1,20	1,50	1,80	2,10	2,40	—	2,40	ac
	0,88	0,90	1,20	1,50	1,80	2,10	2,40	—	3,10	—
	1,00	0,90	1,20	1,50	1,80	2,10	2,40	—	3,10	—
	1,13	0,90	1,20	1,50	1,80	2,10	2,40	—	3,10	—
	1,25	0,90	1,20	1,50	1,80	2,10	2,40	—	3,10	—
	1,50	0,90	1,20	1,50	1,80	2,10	2,40	—	3,10	—
	1,75	0,90	1,20	1,50	1,80	2,10	2,40	—	—	—
2,00	0,90	1,20	1,50	1,80	—	—	—	—	—	
$M_{t,nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 4 Nm					$\Sigma t > 1,25$ mm: 8 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 01 Z 6,3 x L
Hilti S-MD 01 C 6,3 x L
with hexagon head

Annex 16

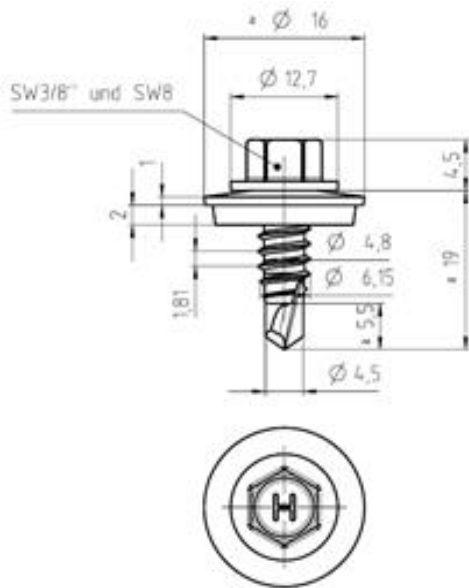

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 3,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ii} [mm]																
	0,63		0,75		0,88		1,00		1,13		1,25		1,50		2,00		
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,63	1,60	—	2,10	—	2,70	—	3,30	—	3,30	ac	3,30	ac	3,30	ac	3,30	ac
	0,75	1,60	—	2,10	—	2,70	—	3,30	—	4,10	—	4,20	ac	4,20	ac	4,20	a
	0,88	1,70	—	2,20	—	2,80	—	3,40	—	4,10	—	4,40	—	5,20	ac	5,20	a
	1,00	1,80	—	2,40	—	3,00	—	3,50	—	4,10	—	4,60	—	5,80	—	6,30	a
	1,13	1,80	—	2,40	—	3,00	—	3,50	—	4,20	—	4,80	—	6,20	—	—	—
	1,25	1,80	—	2,40	—	3,00	—	3,60	—	4,20	—	5,00	—	6,50	—	—	—
	1,50	2,00	—	2,60	—	3,30	—	4,00	—	4,80	—	5,50	—	7,20	—	—	—
	1,75	2,00	—	2,60	—	3,30	—	4,00	—	4,80	—	5,50	—	—	—	—	—
	2,00	2,00	—	2,60	—	3,30	—	4,00	—	—	—	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,50	0,49	—	0,65	—	0,81	—	0,97	—	1,13	ac	1,30	ac	1,67	ac	1,73	ac
	0,55	0,61	—	0,82	—	1,02	—	1,23	—	1,43	ac	1,64	ac	2,11	ac	2,18	ac
	0,63	0,90	—	1,20	—	1,50	—	1,80	—	2,10	ac	2,40	ac	3,10	ac	3,20	ac
	0,75	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	ac	3,10	ac	4,00	a
	0,88	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	—	3,10	ac	4,60	a
	1,00	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	—	3,10	—	4,60	a
	1,13	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	—	3,10	—	—	—
	1,25	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	—	3,10	—	—	—
	1,50	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	—	3,10	—	—	—
	1,75	0,90	—	1,20	—	1,50	—	1,80	—	2,10	—	2,40	—	—	—	—	—
	2,00	0,90	—	1,20	—	1,50	—	1,80	—	—	—	—	—	—	—	—	—
$M_{t,nom}$ [Nm]	$\Sigma t \leq 1,25$ mm: 4 Nm							$\Sigma t > 1,25$ mm: 8 Nm									

No additional regulations.

Self drilling screw

Hilti S-MD 51 Z 6,3 x L
Hilti S-MD 51 C 6,3 x L
with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 17

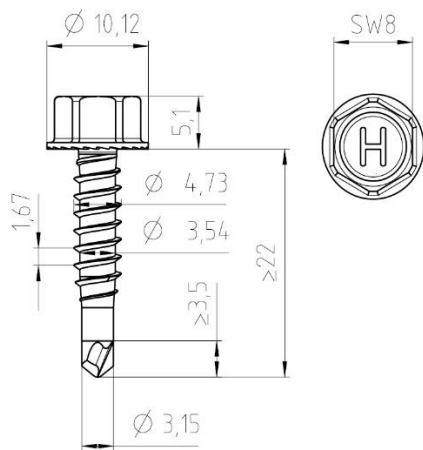

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015
S235, S275, S355 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 2,75$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{II} [mm]										
	0,40	0,50	0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00	
$V_{R,k}$ [kN]	0,40	0,68	0,68	0,68	0,68	0,68	0,68	0,68	0,68	0,68	0,68
	0,50	0,68	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03
	0,55	0,68	1,03	1,23	1,23	1,23	1,23	1,23	1,23	1,23	1,23
	0,63	0,68	1,03	1,55	1,55	1,55	1,55	1,55	1,55	1,55	1,55
	0,75	0,68	1,03	1,55	2,03	2,03	2,03	2,03	2,03	2,03	2,03
	0,88	0,68	1,03	1,55	2,03	2,38	2,38	2,38	2,38	2,38	—
	1,00	0,68	1,03	1,55	2,03	2,38	2,71	2,71	2,71	2,71	—
	1,13	0,68	1,03	1,55	2,03	2,38	2,71	2,71	2,71	2,71	—
	1,25	0,68	1,03	1,55	2,03	2,38	2,71	2,71	2,71	2,71	—
	1,50	0,68	1,03	1,55	2,03	2,38	2,71	2,71	2,71	—	—
	1,75	0,68	1,03	1,55	2,03	2,38	2,71	—	—	—	—
	2,00	0,68	1,03	1,55	2,03	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,40	0,46	0,70	0,77	1,04	1,04	1,04	1,04	1,04	1,04	1,04
	0,50	0,46	0,70	0,77	1,11	1,25	1,25	1,25	1,25	1,25	1,25
	0,55	0,46	0,70	0,77	1,11	1,33	1,33	1,33	1,33	1,33	1,33
	0,63	0,46	0,70	0,77	1,11	1,40	1,40	1,40	1,40	1,40	1,40
	0,75	0,46	0,70	0,77	1,11	1,40	1,69	2,00	2,00	2,00	2,00
	0,88	0,46	0,70	0,77	1,11	1,40	1,69	2,10	2,48	2,70	—
	1,00	0,46	0,70	0,77	1,11	1,40	1,69	2,10	2,48	2,70	—
	1,13	0,46	0,70	0,77	1,11	1,40	1,69	2,10	2,48	2,70	—
	1,25	0,46	0,70	0,77	1,11	1,40	1,69	2,10	2,48	2,70	—
	1,50	0,46	0,70	0,77	1,11	1,40	1,69	2,10	2,48	—	—
	1,75	0,46	0,70	0,77	1,11	1,40	1,69	—	—	—	—
	2,00	0,46	0,70	0,77	1,11	—	—	—	—	—	—
$M_{t,nom}$ [Nm]											

No additional regulations.

Self drilling screw

Hilti S-MD 01 LZ 4,8 x L
Hilti S-MD 01 LC 4,8 x L
with hexagon head

Annex 18

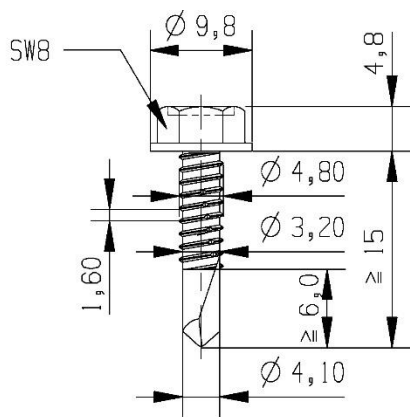

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined





	t_i [mm]	t_{ii} [mm]																	
		0,63	0,75	0,88	1,00	1,50	2,00	3,00	4,00	5,00									
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—						
	0,55	—	—	—	—	—	—	—	—	—	—	—	—						
	0,63	1,29	—	1,29	—	1,29	—	1,74	—	2,30	ac	2,70	ac	2,70	ac	2,70	ac		
	0,75	1,29	—	2,02	—	2,02	—	2,17	—	2,30	—	3,00	—	3,80	ac	3,80	ac	3,80	ac
	0,88	1,29	—	2,02	—	2,26	—	2,34	—	2,60	—	3,50	—	4,90	—	4,90	—	4,90	—
	1,00	1,29	—	2,02	—	2,26	—	2,49	—	2,90	—	4,00	—	6,00	—	6,00	—	6,00	—
	1,13	1,29	—	2,02	—	2,26	—	2,49	—	3,50	—	4,60	—	6,60	—	6,60	—	—	—
	1,25	1,29	—	2,02	—	2,26	—	2,49	—	4,10	—	5,20	—	7,10	—	7,10	—	—	—
	1,50	1,29	—	2,02	—	2,26	—	2,49	—	5,20	—	6,00	—	7,30	—	7,30	—	—	—
	1,75	1,29	—	2,02	—	2,26	—	2,49	—	5,20	—	6,00	—	7,30	—	7,30	—	—	—
	2,00	1,29	—	2,02	—	2,26	—	2,49	—	5,20	—	6,00	—	7,30	—	7,30	—	—	—
$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	0,63	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	1,60	ac	1,60	ac	1,60	ac	1,60	ac
	0,75	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,20	—	2,20	ac	2,20	ac	2,20	ac
	0,88	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	3,00	—	3,00	—	3,00	—
	1,00	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	3,90	—	3,90	—	3,90	—
	1,13	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	4,10	—	4,10	—	—	—
	1,25	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	4,10	—	4,10	—	—	—
	1,50	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	4,10	—	4,10	—	—	—
	1,75	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	4,10	—	4,10	—	—	—
	2,00	0,61	—	0,88	—	1,07	—	1,24	—	1,60	—	2,40	—	4,10	—	4,10	—	—	—
$N_{R,II,k}$ [kN]		0,61	0,88	1,07	1,24	1,60	2,40	4,10	4,10	4,10	4,10	4,10	4,10	4,10	4,10	4,10	4,10	4,10	
$M_{t, nom}$ [Nm]		$\Sigma t \leq 2,15$ mm: 2 Nm					$\Sigma t > 2,15$ mm: 6 Nm												

No additional regulations.

Self drilling screw

Hilti S-MD 03 Z 4,8 x L
Hilti S-MD 03 C 4,8 x L
with hexagon head

Annex 19

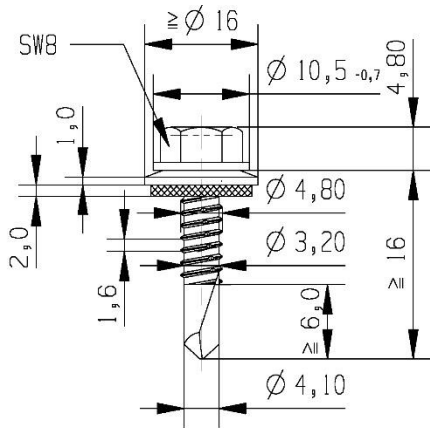

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD - EN 10346: 2015

Component II: S280GD, S320GD - EN 10346: 2015
S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{II} [mm]															
	1,50		2,00		3,00		4,00		5,00		6,00		—		—	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	0,63	2,40	ac	2,70	ac	2,70	ac	2,70	ac	2,70	ac	—	—	—	—	—
	0,75	3,00	—	3,50	ac	3,90	ac	3,90	ac	3,90	ac	—	—	—	—	—
	0,88	3,40	—	4,10	—	5,40	—	5,40	—	5,40	—	—	—	—	—	—
	1,00	3,70	—	4,70	—	6,60	—	6,60	—	6,60	—	—	—	—	—	—
	1,13	4,00	—	5,00	—	6,70	—	6,70	—	—	—	—	—	—	—	—
	1,25	4,40	—	5,30	—	6,80	—	6,80	—	—	—	—	—	—	—	—
	1,50	4,90	—	5,60	—	6,90	—	6,90	—	—	—	—	—	—	—	—
	1,75	4,90	—	5,60	—	6,90	—	6,90	—	—	—	—	—	—	—	—
	2,00	4,90	—	5,60	—	6,90	—	6,90	—	—	—	—	—	—	—	—
$N_{R,k}$ [kN]	0,50	0,92	ac	1,40	ac	1,40	ac	1,40	ac	1,40	ac	—	—	—	—	—
	0,55	1,16	ac	1,77	ac	1,77	ac	1,77	ac	1,77	ac	—	—	—	—	—
	0,63	1,70	ac	2,60	ac	2,60	ac	2,60	ac	2,60	ac	—	—	—	—	—
	0,75	1,70	—	2,70	ac	3,30	ac	3,30	ac	3,30	ac	—	—	—	—	—
	0,88	1,70	—	2,70	—	4,20	—	4,20	—	4,20	—	—	—	—	—	—
	1,00	1,70	—	2,70	—	5,00	—	5,00	—	5,00	—	—	—	—	—	—
	1,13	1,70	—	2,70	—	5,20	—	5,20	—	—	—	—	—	—	—	—
	1,25	1,70	—	2,70	—	5,20	—	5,20	—	—	—	—	—	—	—	—
	1,50	1,70	—	2,70	—	5,20	—	5,20	—	—	—	—	—	—	—	—
	1,75	1,70	—	2,70	—	5,20	—	5,20	—	—	—	—	—	—	—	—
	2,00	1,70	—	2,70	—	5,20	—	5,20	—	—	—	—	—	—	—	—
$M_{t, nom}$ [Nm]	$\Sigma t \leq 2,15$ mm: 2 Nm										$\Sigma t > 2,15$ mm: 6 Nm					

No additional regulations.

Self drilling screw

Hilti S-MD 53 Z 4,8 x L
Hilti S-MD 53 C 4,8 x L
with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 20

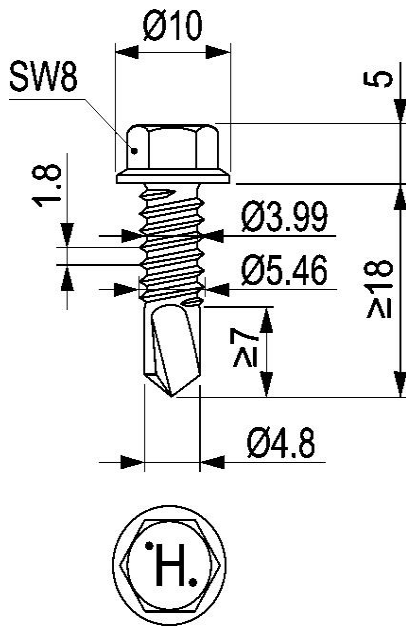

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015
S235, S275, S355 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{II} [mm]											
	0,63	0,75	0,88	1,00	1,50	2,00	3,00	4,00	5,00			
$V_{R,k}$ [kN]	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	1,50	1,75	2,00	
$N_{R,k}$ [kN]	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	1,50	1,75	2,00	
	0,63	0,75	0,88	1,00	1,50	2,00	3,00	4,00	5,00			
	0,75	0,88	1,00	1,50	2,00	3,00	4,00	5,00				
	0,88	1,00	1,50	2,00	3,00	4,00	5,00					
	1,00	1,50	2,00	3,00	4,00	5,00						
	1,13	1,50	2,00	3,00	4,00	5,00						
	1,25	1,50	2,00	3,00	4,00	5,00						
	1,50	1,50	2,00	3,00	4,00	5,00						
	1,75	1,50	2,00	3,00	4,00	5,00						
	2,00	1,50	2,00	3,00	4,00	5,00						
	$N_{R,II,k}$ [kN]	0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	8,20		
	$M_{t,nom}$ [Nm]	$\Sigma t \leq 3,00$ mm: 7 Nm					$\Sigma t > 3,00$ mm: 8 Nm					

No additional regulations.

Self drilling screw

Hilti S-MD 03 Z 5,5 x L
Hilti S-MD 03 C 5,5 x L
with hexagon head

Annex 21

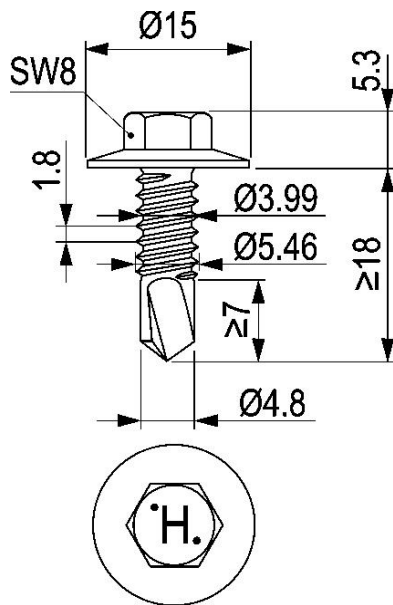

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015
S235, S275, S355 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined



t_i [mm]	t_{ii} [mm]									
	0,63	0,75	0,88	1,00	1,50	2,00	3,00	4,00	5,00	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—	—
	0,63	1,61	1,61	1,61	1,88	1,88	2,60 ac	2,60 ac	2,60 ac	2,60 ac
	0,75	1,61	1,88	1,88	2,06	2,06	3,70 ac	3,70 ac	3,70 ac	3,70 ac
	0,88	1,61	1,88	2,05	2,13	2,13	4,50	5,00 ac	5,00 ac	5,00 ac
	1,00	1,61	1,88	2,05	2,20	2,20	4,50	6,50 a	6,50 a	6,50 a
	1,13	1,61	1,88	2,05	2,20	2,76	4,90	7,00	7,90	—
	1,25	1,61	1,88	2,05	2,20	3,28	5,30	7,40	9,30	—
	1,50	1,61	1,88	2,05	2,20	4,36	6,20	8,30	9,50	—
	1,75	1,61	1,88	2,05	2,20	4,36	6,20	8,30	9,50	—
	2,00	1,61	1,88	2,05	2,20	4,36	7,80	9,40	9,50	—
	$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
0,55		—	—	—	—	—	—	—	—	—
0,63		0,61	0,80	1,02 ac	1,23	2,15	3,11 ac	3,11 ac	3,11 ac	3,11 ac
0,75		0,61	0,80	1,02 ac	1,23	2,15	3,16 ac	4,61 ac	4,61 ac	4,61 ac
0,88		0,61	0,80	1,02	1,23	2,15	3,16	5,48 ac	6,25 ac	6,25 ac
1,00		0,61	0,80	1,02	1,23	2,15	3,16	5,48 a	7,75 a	7,75 a
1,13		0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	—
1,25		0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	—
1,50		0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	—
1,75		0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	—
2,00		0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	—
$N_{R,II,k}$ [kN]		0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	8,20
$M_{t,nom}$ [Nm]	$\Sigma t \leq 3,00$ mm: 7 Nm					$\Sigma t > 3,00$ mm: 8 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 23 Z 5,5 x L
Hilti S-MD 23 C 5,5 x L
with hexagon head with collar

Annex 22

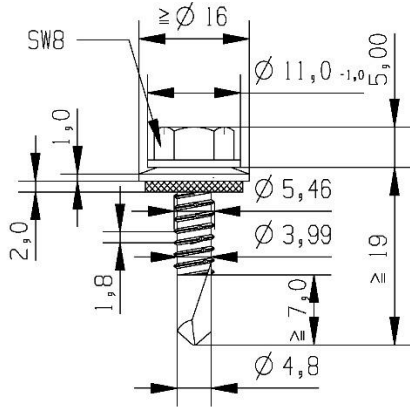

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ij} [mm]								
	0,63	0,75	0,88	1,00	1,50	2,00	3,00	4,00	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	—	—	—	—	3,10 ac	3,10 ac	3,10 abcd
	0,75	—	—	—	—	—	3,80 ac	3,80 ac	3,80 ac
	0,88	—	—	—	—	—	4,60 —	4,60 ac	4,60 ac
	1,00	—	—	—	—	—	5,30 —	5,40 —	5,40 a
	1,13	—	—	—	—	—	5,30 —	6,20 —	6,20 —
	1,25	—	—	—	—	—	5,30 —	7,60 —	9,50 —
	1,50	—	—	—	—	—	6,10 —	9,10 —	9,50 —
	1,75	—	—	—	—	—	6,10 —	9,10 —	9,50 —
	2,00	—	—	—	—	—	7,80 —	9,70 —	9,50 —
$N_{R,k}$ [kN]	0,50	0,61 —	0,80 —	1,02 —	1,23 —	1,73 —	1,73 ac	1,73 ac	1,73 abcd
	0,55	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	2,18 ac	2,18 ac	2,18 abcd
	0,63	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 ac	3,20 ac	3,20 abcd
	0,75	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 ac	3,90 ac	3,90 ac
	0,88	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	4,80 ac	4,80 ac
	1,00	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	5,48 —	5,60 a
	1,13	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	5,48 —	6,50 —
	1,25	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	5,48 —	7,20 —
	1,50	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	5,48 —	8,20 —
	1,75	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	5,48 —	8,20 —
	2,00	0,61 —	0,80 —	1,02 —	1,23 —	2,15 —	3,16 —	5,48 —	8,20 —
$N_{R,II,k}$ [kN]	0,61	0,80	1,02	1,23	2,15	3,16	5,48	8,20	
$M_{t,nom}$ [Nm]	$\Sigma t \leq 3,00$ mm: 7 Nm				$\Sigma t > 3,00$ mm: 8 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 53 Z 5,5 x L
Hilti S-MD 53 C 5,5 x L
with hexagon head and sealing washer $\geq \text{Ø}16$ mm

Annex 23

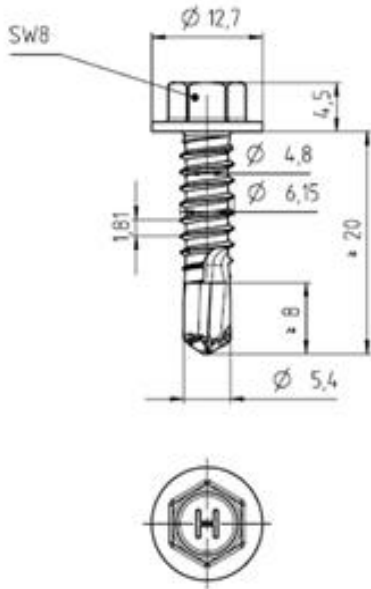

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015
S235, S275, S355 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{ii} [mm]								
	1,00	1,50	2,00	2,50	3,00	4,00	5,00	6,00	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	1,92	—	1,92	—	3,10	ac	3,10	ac
	0,75	2,07	—	2,07	—	4,20	ac	4,20	ac
	0,88	2,35	—	2,35	—	5,40	ac	5,40	ac
	1,00	2,60	—	2,60	—	5,60	—	5,60	—
	1,13	2,60	—	3,16	—	5,70	—	5,70	—
	1,25	2,60	—	3,68	—	5,90	—	5,90	—
	1,50	2,60	—	4,75	—	7,00	—	7,00	—
	1,75	2,60	—	4,75	—	7,00	—	7,00	—
	2,00	2,60	—	4,75	—	7,00	—	7,00	—
$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	1,23	—	1,90	—	1,90	ac	1,90	ac
	0,75	1,23	—	2,46	—	2,60	ac	2,60	ac
	0,88	1,23	—	2,46	—	3,21	ac	3,40	ac
	1,00	1,23	—	2,46	—	3,21	—	4,30	—
	1,13	1,23	—	2,46	—	3,21	—	4,62	—
	1,25	1,23	—	2,46	—	3,21	—	4,62	—
	1,50	1,23	—	2,46	—	3,21	—	4,62	—
	1,75	1,23	—	2,46	—	3,21	—	4,62	—
	2,00	1,23	—	2,46	—	3,21	—	4,62	—
$M_{t, nom}$ [Nm]	$\Sigma t \leq 3,00$ mm: 7 Nm				$\Sigma t > 3,00$ mm: 8 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 03 Z 6,3 x L
Hilti S-MD 03 C 6,3 x L
with hexagon head

Annex 24

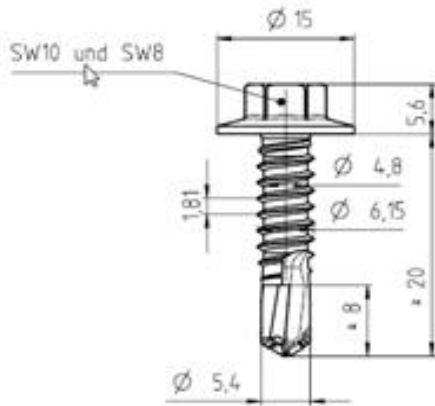

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: none

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015
S235, S275, S355 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined


t_i [mm]	t_{II} [mm]							
	1,00	1,50	2,00	2,50	3,00	4,00	5,00	6,00
$V_{R,k}$ [kN]								
0,50	—	—	—	—	—	—	—	—
0,55	—	—	—	—	—	—	—	—
0,63	1,92	—	1,92	—	3,10	ac	3,10	abcd
0,75	2,07	—	2,07	—	4,20	ac	4,20	abcd
0,88	2,35	—	2,35	—	5,40	ac	5,40	ac
1,00	2,60	—	2,60	—	5,60	—	6,60	ac
1,13	2,60	—	3,16	—	5,70	—	7,80	—
1,25	2,60	—	3,68	—	5,90	—	9,00	—
1,50	2,60	—	4,75	—	7,00	—	9,70	—
1,75	2,60	—	4,75	—	7,00	—	9,70	—
2,00	2,60	—	4,75	—	7,00	—	9,70	—
$N_{R,k}$ [kN]								
0,50	—	—	—	—	—	—	—	—
0,55	—	—	—	—	—	—	—	—
0,63	1,23	—	2,01	—	2,01	ac	2,01	abcd
0,75	1,23	—	2,29	—	2,29	ac	2,29	abcd
0,88	1,23	—	2,46	—	2,92	ac	2,92	abcd
1,00	1,23	—	2,46	—	3,21	—	3,78	ac
1,13	1,23	—	2,46	—	3,21	—	4,62	—
1,25	1,23	—	2,46	—	3,21	—	4,62	—
1,50	1,23	—	2,46	—	3,21	—	6,03	—
1,75	1,23	—	2,46	—	3,21	—	6,03	—
2,00	1,23	—	2,46	—	3,21	—	6,03	—
$M_{t,norm}$ [Nm]	$\Sigma t \leq 3,00$ mm: 7 Nm				$\Sigma t > 3,00$ mm: 8 Nm			

No additional regulations.

Self drilling screw

Hilti S-MD 23 Z 6,3 x L
Hilti S-MD 23 C 6,3 x L
with hexagon head with collar

Annex 25

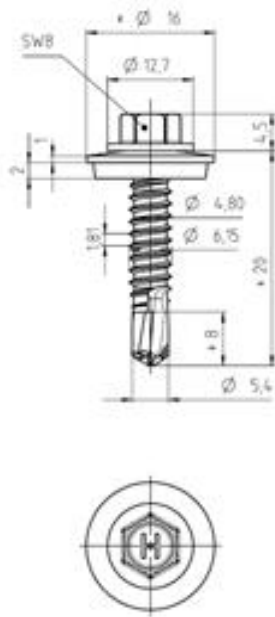

Material:

Fastener: carbon steel, case hardened and galvanized or coated

Washer: carbon steel, galvanized or coated
stainless Steel (1.4301) - EN 10088-1: 2014

Component I: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015

Component II: S280GD, S320GD, S350GD, S390GD - EN 10346: 2015
S235, S275, S355 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 6,00$ mm

Timber substructures:

No performance determined

t_i [mm]	t_{ii} [mm]								
	1,50	2,00	2,50	3,00	4,00	5,00	6,00	—	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	3,00 ac	3,00 ac	3,00 abcd	3,00 abcd	3,00 abcd	—	—
	0,75	—	3,80 ac	3,80 ac	3,80 abcd	3,80 abcd	3,80 abcd	—	—
	0,88	—	4,80 —	4,80 —	4,80 ac	4,80 abc	4,80 abc	—	—
	1,00	—	5,10 —	5,10 —	5,70 ac	5,70 ac	5,70 ac	—	—
	1,13	—	5,50 —	5,50 —	6,80 ac	6,80 a	—	—	—
	1,25	—	6,10 —	6,10 —	7,90 ac	7,90 a	—	—	—
	1,50	—	6,40 —	6,40 —	9,00 —	10,00 a	—	—	—
	1,75	—	6,40 —	6,40 —	9,00 —	10,00 —	—	—	—
	2,00	—	7,80 —	7,80 —	9,40 —	10,00 —	—	—	—
$N_{R,k}$ [kN]	0,50	—	1,78 ac	1,78 abcd	1,78 abcd	1,78 abcd	1,78 abcd	—	—
	0,55	—	2,25 ac	2,25 abcd	2,25 abcd	2,25 abcd	2,25 abcd	—	—
	0,63	—	3,21 ac	3,30 ac	3,30 abcd	3,30 abcd	3,30 abcd	—	—
	0,75	—	3,21 ac	4,00 ac	4,00 abcd	4,00 abcd	4,00 abcd	—	—
	0,88	—	3,21 —	4,62 —	4,80 ac	4,80 abc	4,80 abc	—	—
	1,00	—	3,21 —	4,62 —	5,60 ac	5,60 ac	5,60 ac	—	—
	1,13	—	3,21 —	4,62 —	6,03 ac	6,40 a	—	—	—
	1,25	—	3,21 —	4,62 —	6,03 ac	7,20 a	—	—	—
	1,50	—	3,21 —	4,62 —	6,03 —	7,20 a	—	—	—
	1,75	—	3,21 —	4,62 —	6,03 —	7,20 —	—	—	—
	2,00	—	3,21 —	4,62 —	6,03 —	7,20 —	—	—	—
$M_{t,nom}$ [Nm]	$\Sigma t \leq 3,00$ mm: 7 Nm				$\Sigma t > 3,00$ mm: 8 Nm				

No additional regulations.

Self drilling screw

Hilti S-MD 53 Z 6,3 x L
Hilti S-MD 53 C 6,3 x L
with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 26

Material:
Fastener: carbon steel, case hardened and galvanized or coated
Washer: none
Component I: S280GD, S320GD - EN 10346: 2015
Component II: S280GD, S320GD - EN 10346: 2015
 S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 15,00$ mm

Timber substructures:
 No performance determined


t_i [mm]	t_{ii} [mm]								
	2,00	3,00	4,00	6,00	8,00	10,0	12,0	$\geq 14,0$	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	—	2,49	2,49	2,49	2,49	2,49	2,49
	0,75	—	—	3,04	3,04	3,04	3,04	3,04	3,04
	0,88	—	—	3,87	3,87	3,87	3,87	3,87	3,87
	1,00	—	—	4,91	4,91	4,91	4,91	4,91	4,91
	1,13	—	—	6,24	6,24	6,24	6,24	6,24	—
	1,25	—	—	7,69	7,69	7,69	7,69	7,69	—
	1,50	—	—	7,69	7,69	7,69	7,69	7,69	—
	1,75	—	—	7,69	7,69	7,69	7,69	7,69	—
	2,00	—	—	7,69	7,69	7,69	7,69	7,69	—
$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	—	2,50	2,50	2,50	2,50	2,50	2,50
	0,75	—	—	2,99	2,99	2,99	2,99	2,99	2,99
	0,88	—	—	3,50	3,50	3,50	3,50	3,50	3,50
	1,00	—	—	3,99	3,99	3,99	3,99	3,99	3,99
	1,13	—	—	4,50	4,50	4,50	4,50	4,50	—
	1,25	—	—	4,97	4,97	4,97	4,97	4,97	—
	1,50	—	—	5,99	5,99	5,99	5,99	5,99	—
	1,75	—	—	6,95	6,95	6,95	6,95	6,95	—
	2,00	—	—	7,96	7,96	7,96	7,96	7,96	—
$M_{t,nom}$ [Nm]	5 Nm								

No additional regulations.

Self drilling screw

Hilti S-MD 05 GZ 5,5 x L
 Hilti S-MD 05 GC 5,5 x L
 Hilti S-MD 05 Z 5,5 x L
 Hilti S-MD 05 C 5,5 x L
 with hexagon head

Annex 27

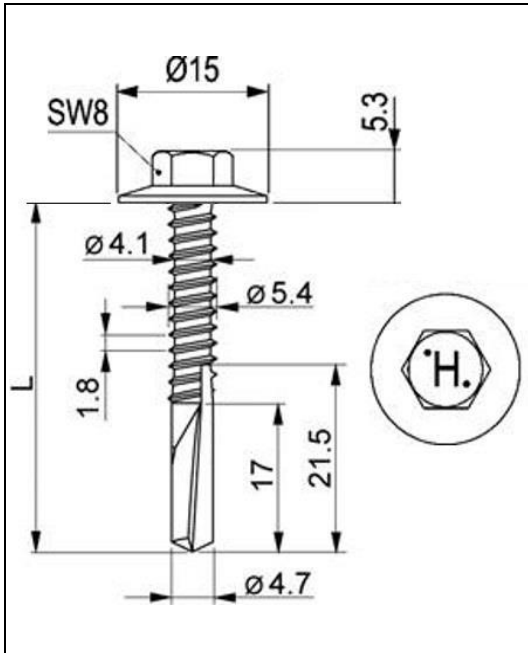

Material:
Fastener: carbon steel, case hardened and galvanized or coated
Washer: none
Component I: S280GD, S320GD - EN 10346: 2015
Component II: S280GD, S320GD - EN 10346: 2015
 S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 15,00$ mm

Timber substructures:
 No performance determined

t_i [mm]	t_{II} [mm]								
	2,00	3,00	4,00	6,00	8,00	10,0	12,0	$\geq 14,0$	
$V_{R,x}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	—	2,49	2,49	2,49	2,49	2,49	2,49
	0,75	—	—	3,04	3,04	3,04	3,04	3,04	3,04
	0,88	—	—	3,87	3,87	3,87	3,87	3,87	3,87
	1,00	—	—	4,91	4,91	4,91	4,91	4,91	4,91
	1,13	—	—	6,24	6,24	6,24	6,24	6,24	—
	1,25	—	—	7,69	7,69	7,69	7,69	7,69	—
	1,50	—	—	7,69	7,69	7,69	7,69	7,69	—
	1,75	—	—	7,69	7,69	7,69	7,69	7,69	—
	2,00	—	—	7,69	7,69	7,69	7,69	7,69	—
$N_{R,x}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	—	2,50	2,50	2,50	2,50	2,50	2,50
	0,75	—	—	2,99	2,99	2,99	2,99	2,99	2,99
	0,88	—	—	3,50	3,50	3,50	3,50	3,50	3,50
	1,00	—	—	3,99	3,99	3,99	3,99	3,99	3,99
	1,13	—	—	4,50	4,50	4,50	4,50	4,50	—
	1,25	—	—	4,97	4,97	4,97	4,97	4,97	—
	1,50	—	—	5,99	5,99	5,99	5,99	5,99	—
	1,75	—	—	6,95	6,95	6,95	6,95	6,95	—
	2,00	—	—	7,96	7,96	7,96	7,96	7,96	—
$M_{t, nom}$ [Nm]	5 Nm								

No additional regulations.

Self drilling screw	Annex 28
Hilti S-MD 25 Z 5,5 x L Hilti S-MD 25 C 5,5 x L with hexagon head with collar	

Material:
Fastener: carbon steel, case hardened and galvanized or coated
Washer: carbon steel, galvanized or coated stainless Steel (1.4301) - EN 10088-1: 2014
Component I: S280GD, S320GD - EN 10346: 2015
Component II: S280GD, S320GD - EN 10346: 2015 S235 - EN 10025-1: 2004

Drilling capacity: $\Sigma t_i \leq 15,00$ mm

Timber substructures:
 No performance determined

t_i [mm]	t_{II} [mm]								
	2,00	3,00	4,00	6,00	8,00	10,0	12,0	≥ 14,0	
$V_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	—	—	—	—	—	—
	0,63	—	—	2,49	2,49	2,49	2,49	2,49	2,49
	0,75	—	—	3,04	3,04	3,04	3,04	3,04	3,04
	0,88	—	—	3,87	3,87	3,87	3,87	3,87	3,87
	1,00	—	—	4,91	4,91	4,91	4,91	4,91	4,91
	1,13	—	—	6,24	6,24	6,24	6,24	6,24	—
	1,25	—	—	7,69	7,69	7,69	7,69	7,69	—
	1,50	—	—	7,69	7,69	7,69	7,69	7,69	—
	1,75	—	—	7,69	7,69	7,69	7,69	7,69	—
	2,00	—	—	7,69	7,69	7,69	7,69	7,69	—
$N_{R,k}$ [kN]	0,50	—	—	—	—	—	—	—	—
	0,55	—	—	2,32	2,32	2,32	2,32	2,32	2,32
	0,63	—	—	2,55	2,55	2,55	2,55	2,55	2,55
	0,75	—	—	3,02	3,02	3,02	3,02	3,02	3,02
	0,88	—	—	3,51	3,51	3,51	3,51	3,51	3,51
	1,00	—	—	4,00	4,00	4,00	4,00	4,00	4,00
	1,13	—	—	4,51	4,51	4,51	4,51	4,51	—
	1,25	—	—	4,99	4,99	4,99	4,99	4,99	—
	1,50	—	—	6,06	6,06	6,06	6,06	6,06	—
	1,75	—	—	7,09	7,09	7,09	7,09	7,09	—
	2,00	—	—	8,23	8,23	8,23	8,23	8,23	—
$M_{t, nom}$ [Nm]	5 Nm								

No additional regulations.

Self drilling screw

Hilti S-MD 55 GZ 5,5 x L
 Hilti S-MD 55 GC 5,5 x L
 Hilti S-MD 55 Z 5,5 x L
 Hilti S-MD 55 C 5,5 x L
 with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 29



British Board of Agrément,
1st Floor Building 3,
Hatters Lane,
Croxley Park
Watford
WD18 8YG